

Metallized Polypropylene Film DC-Link Capacitors

FDE Series - 450 ~ 900VDC (Automotive Grade) for EV/HEV



Overview

The FDE capacitor is constructed of segmented metallized polypropylene film in customized PPS case, specially treated to have a very high dielectric strength in operating conditions up to 105°C.

Applications

Specially design for DC filtering and DC-Link circuits for EV/HEV.

Features

- Low ESR
- Low ESL
- Self-healing technology
- High ripple current
- UL 94 V-0 PPS Plastic Case
- Automotive Grade (AEC-Q200D)
- THB Grade IIIB




Qualification

Reference Standard	IEC 61071, AEC-Q200D
Climate Category	40/105/56 IEC 60068-1



Marking

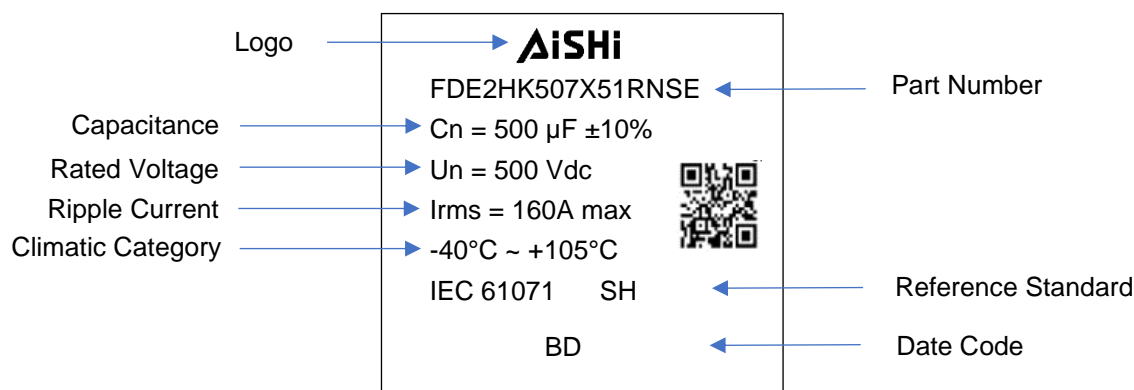

Manufacturing Date Code

Year	Code	Month	Code
2018	A	Jan	1
2019	B	Feb	2
2020	C	Mar	3
2021	D	Apr	4
2022	E	May	5
2023	F	Jun	6

Year	Code	Month	Code
2024	G	Jul	7
2025	H	Aug	8
2026	J	Sep	9
2027	K	Oct	A
2028	L	Nov	N
2029	M	Dec	D

Part Number System

F	DE	2H	K	507	X51	RNS	E
Capacitor Type	Series	Voltage (VDC)	Tolerance	Capacitance (pF)	Case Code	Terminal Code	Internal Code
F = Film	DC Link, Customized PPS Plastic Case, Metallized Segmented PP Film	450=2W 500=2H 550=2J 600=2K 700=2M 800=2N 900=2Q	J = ±5% K = ±10%	First two digits = significant figures. Third digit = Number of zeros.	Refer to Customized Case Code Table	Refer to Terminal Code Table	Internal Code

Customized Case Code Table

Drawing Code 1	Drawing Code 2	Drawing Code 3
A ~ Z	0 ~ 9	0 ~ 9

Terminal Code

Digit One (Terminal Type)		Digit Two (Terminal Space)		Digit Three (No. of Terminal)	
EV Terminal	R	N/A	N	2	Q
				4	R
				6	S
				8	T
				10	U
				12	V
				14	W
				16	X

Terminal Configuration

Fig. 2a


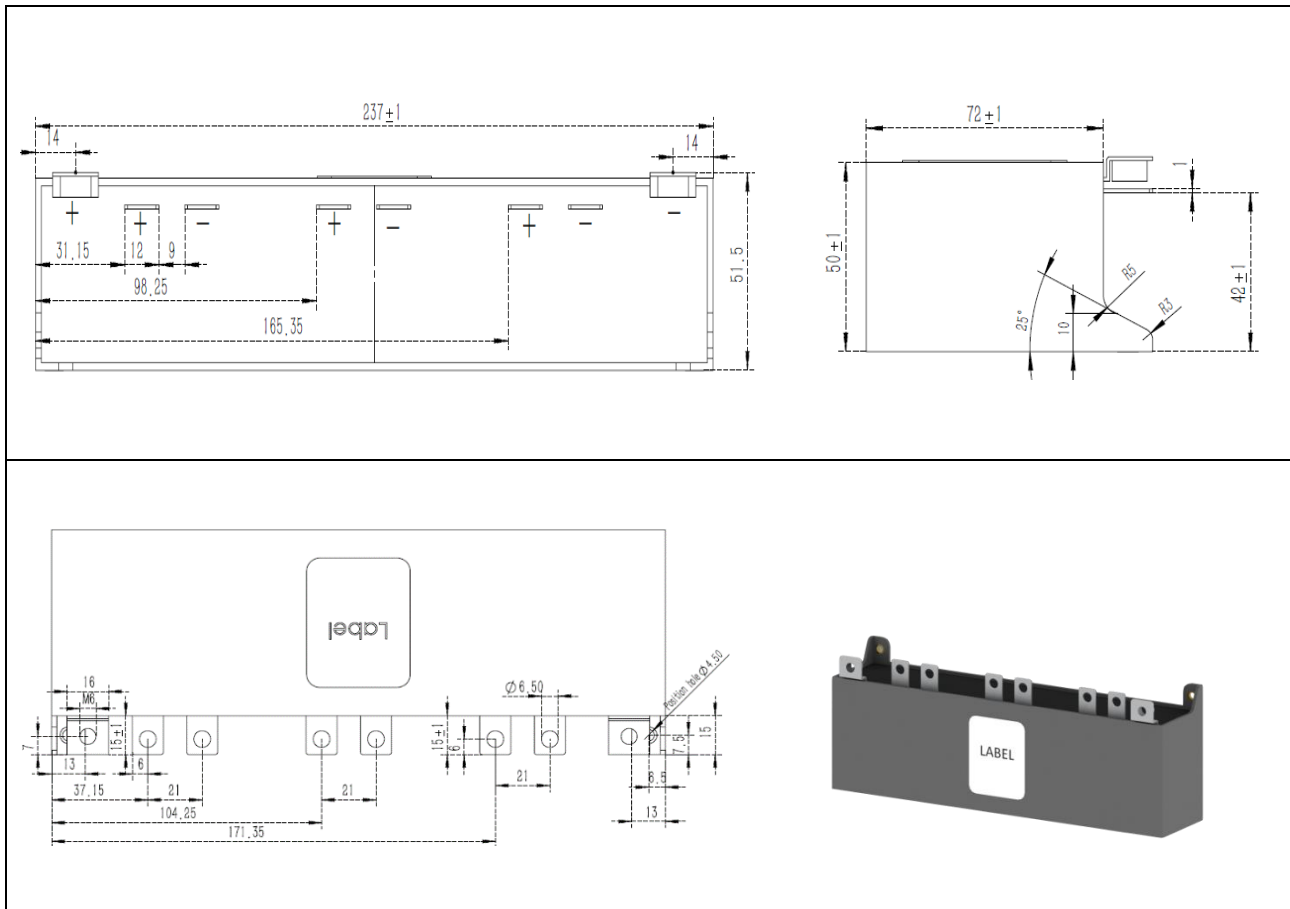


Fig. 2b

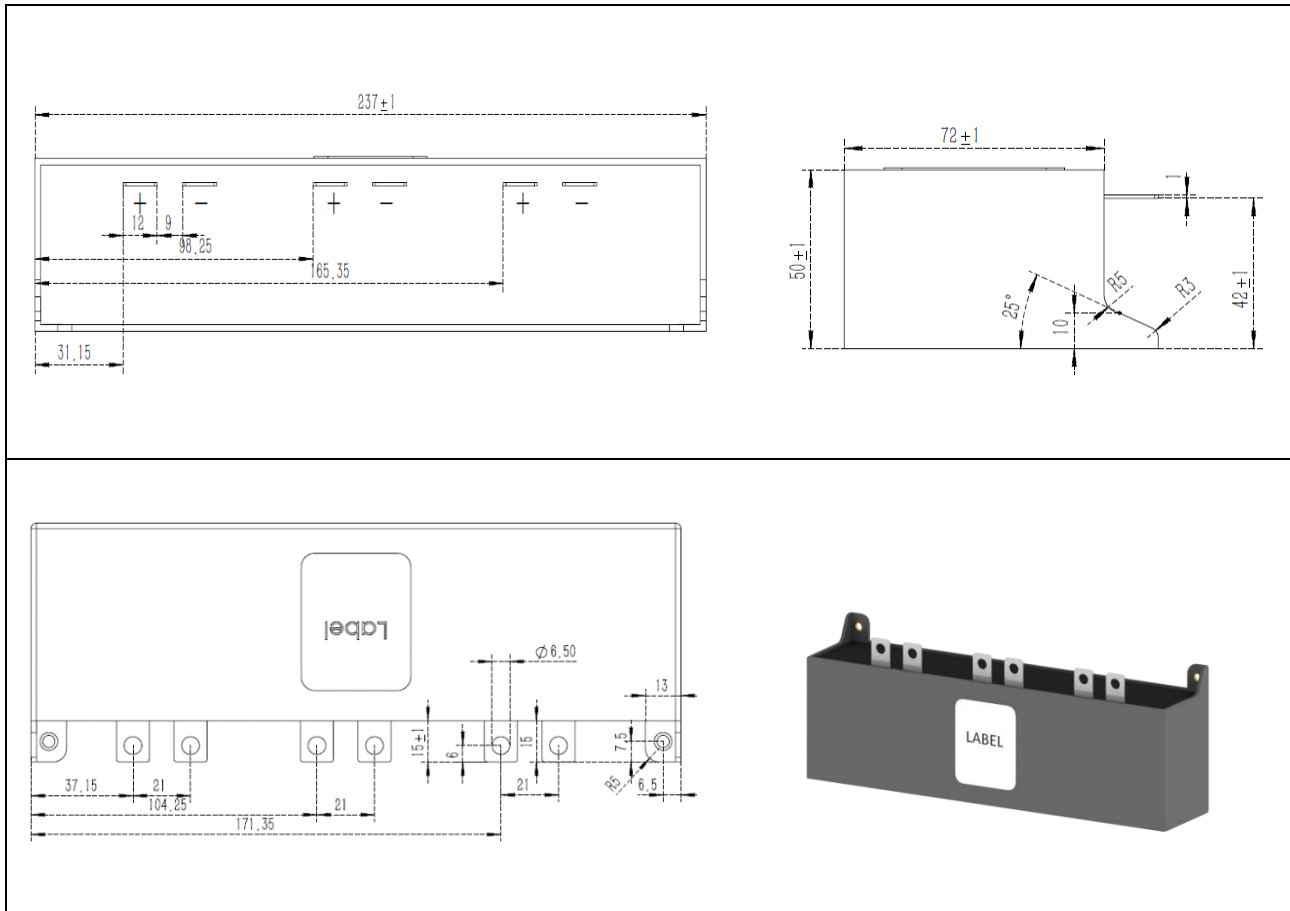

Rating and Part Number

V _{ndc} V	C _n μF	I _{max} A	L _{self} nH	R _s mΩ	I _{pk} kA	I _s kA	DF max 100Hz	Dimension LxHxW mm	Weight kg	Fig-	Ordering Code
450	500	120	15	1.0	1.5	4.5	10*10 ⁻⁴	237*72*50	1.2	2a	FDE2WK507X14RNTN
450	500	170	15	0.7	1.8	5.5	10*10 ⁻⁴	237*72*50	1.2	2b	FDE2WK507X14RNSN
450	700	170	15	0.7	2.8	8.4	10*10 ⁻⁴	237*72*50	1.2	2a	FDE2WK707X14RNTN
450	700	170	15	0.7	2.8	8.4	10*10 ⁻⁴	237*72*50	1.2	2b	FDE2WK707X14RNSN
450	900	170	15	0.7	3.3	9.9	10*10 ⁻⁴	237*72*50	1.2	2a	FDE2WK907X14RNTN
450	900	170	15	0.7	3.3	9.9	10*10 ⁻⁴	237*72*50	1.2	2b	FDE2WK907X14RNSN

Metallized Polypropylene Film DC-Link Capacitors

FDE Series - 450 ~ 900VDC (Automotive Grade) for EV/HEV



Terminal Configuration

Fig. 3a


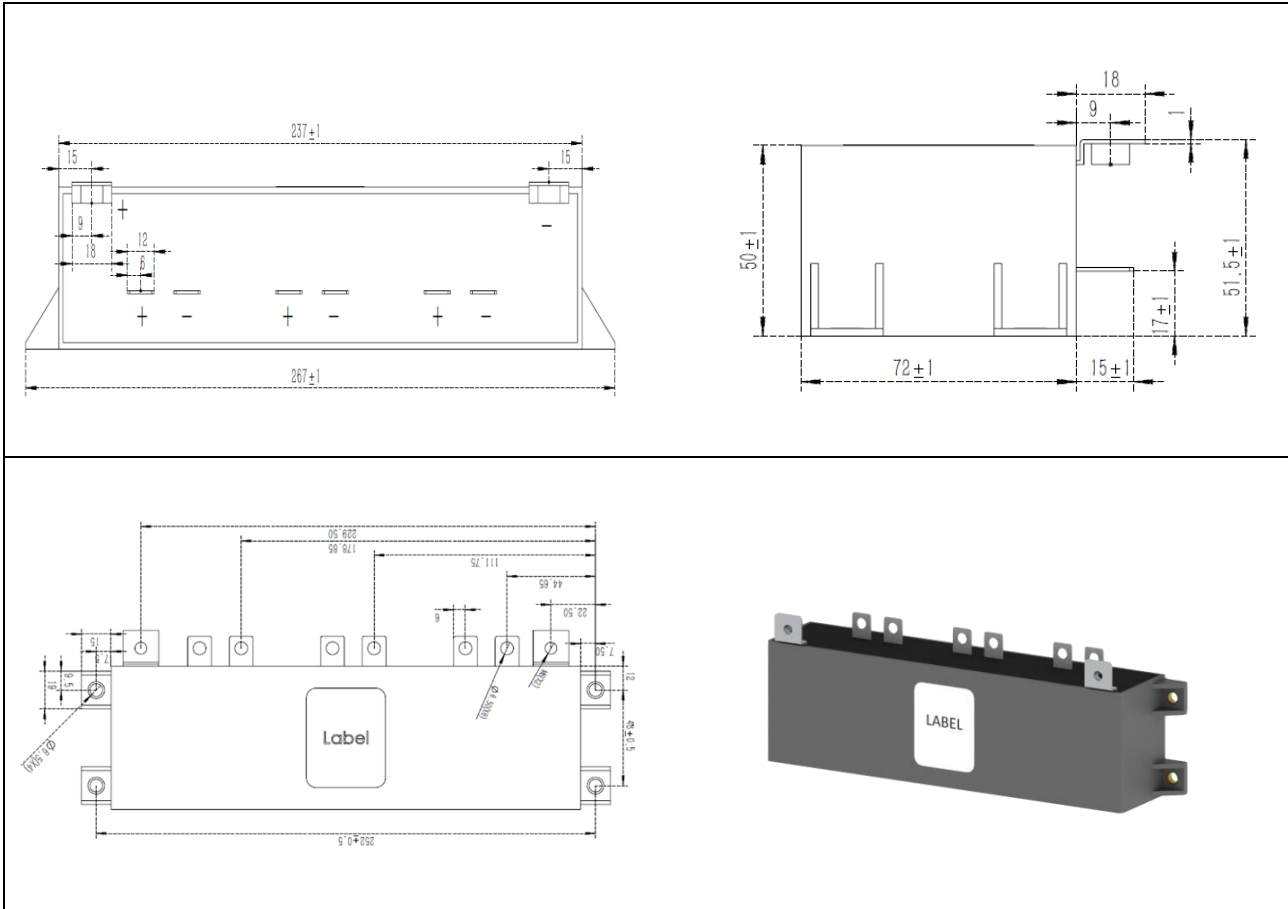


Fig. 3b

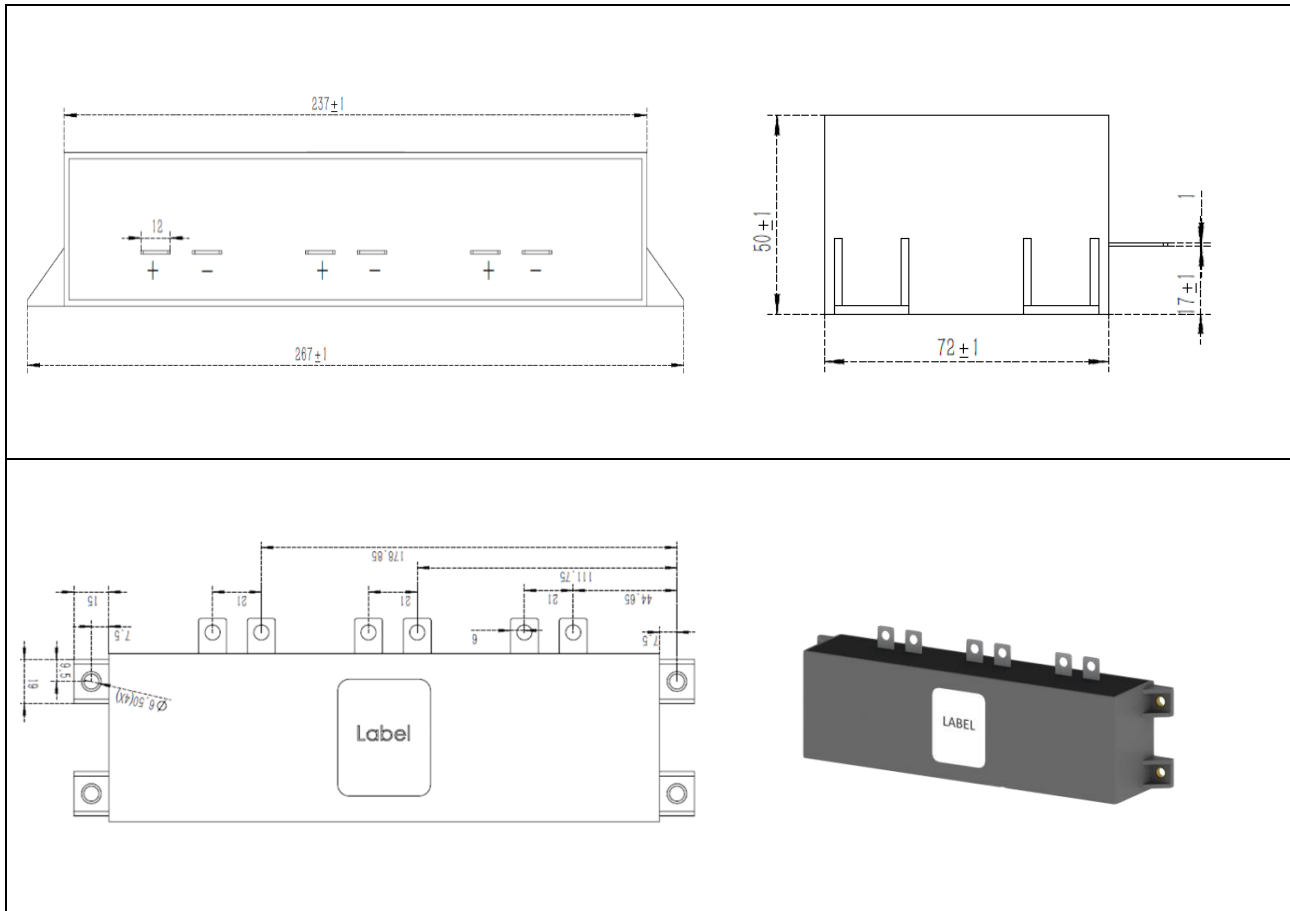


Rating and Part Number

V _{ndc} V	C _n μF	I _{max} A	L _{self} nH	R _s mΩ	I _{pk} kA	I _s kA	DF max 100Hz	Dimension LxHxW mm	Weight kg	Fig-	Ordering Code
450	500	170	15	0.7	1.8	5.5	10*10 ⁻⁴	237*72*50	1.2	3a	FDE2WK507X15RNTN
450	500	170	15	0.7	1.8	5.5	10*10 ⁻⁴	237*72*50	1.2	3b	FDE2WK507X15RNSN
450	700	190	15	0.5	2.5	7.5	10*10 ⁻⁴	237*72*50	1.2	3a	FDE2WK707X15RNTN
450	700	170	15	0.7	2.8	8.4	10*10 ⁻⁴	237*72*50	1.2	3b	FDE2WK707X15RNSN
450	900	190	15	0.5	3.0	9.0	10*10 ⁻⁴	237*72*50	1.2	3a	FDE2WK907X15RNTN
450	900	170	15	0.7	3.3	9.9	10*10 ⁻⁴	237*72*50	1.2	3b	FDE2WK907X15RNSN

General Technical Data

Applications	DC Link / DC Filtering
Dielectric	Segmented Metallized Polypropylene Film
Reference Standard	IEC 61071 / AEC-Q200D
Climatic Category	40/105/56 IEC 60068-1
Rated Temperature T _R	+85°C
Operating Temperature Range	-40°C ~ +105°C (85°C ~105°C, decreasing factor 1.25% per °C for Rated Voltage)
Storage Temperature	-40°C ~ +105°C
Storage Conditions	Storage time: ≤24 months from the date marked on the label package. Temperature and relative humidity should be -10°C ~ +40°C and not more than 75%RH. RH ≤85% for 30 days randomly distributed throughout the year.
Storage Life	Product that passed less than 2 years from production, No need reconfirmation
RoHS Compliance	Compliant with the restricted substance requirement of Directive 2011/65/EU

Constructions

Metallized Film	OPP & Al/Zn
Metal Sprayed	Zn
Connection electrode	Tinned coated Copper
Case	- PPS plastic case for mass production - CNC PC plastic case for confirmation of mechanical dimension and some electrical parameters, not for vibration and environment test.
Filling	Epoxy resin, flame retardant UL 94 V0
Terminal	Tinned coated Copper
Film Construction	Mono Structure 


Electrical Characteristics

Voltage Range	450Vdc ~ 900Vdc
Capacitance Range	300 μ F ~ 1000 μ F
Capacitance Tolerance	\pm 5% or \pm 10% at +25°C
Capacitance	Measuring Frequency at 100 Hz Measuring Voltage: 1 ± 0.2 V
Standard Atmospheric Conditions for Static Test	Ambient temperature 15°C to 35°C (If there is any doubt on the results, the measurements shall be made at +20 +/- 5°C) Relative humidity 45% to 75% (If there is any doubt on the results, the measurements shall be made at 60% to 70 %.) Air pressure 86 kPa to 106 kPa.
Visual examination, Marking (Non-Destructive)	Appearance: no remarkable abnormality
Voltage Between Terminals U_{TT}	1.5 U_n / 10s (25 \pm 5°C)
Voltage Between Terminals and Case U_{TC}	3000V _{AC} 50/60Hz 10 s
Dielectric dissipation factor $tg\delta_0$	$\leq 2 \times 10^{-4}$
Dissipation factor	0.0010 (20°C, 100Hz)
Insulation Resistance	$\geq 10\,000$ s (25°C, 500V, 1min)
Hot-Spot	$\leq 105^\circ\text{C}$
Life Expectancy	$\geq 100,000$ hours at rated voltage and Hot-Spot Temperature $T = +70^\circ\text{C}$
Failure Rate	≤ 50 FIT
Degree of protection	IP00 rating
Overvoltage	Maximum duration within one day
Apply 110% of rated voltage	30% of on-load duration
Apply 115% of rated voltage	30 mins
Apply 120% of rated voltage	5 mins
Apply 130% of rated voltage	1 min
Apply 150% of rated voltage	30 ms every time, 100 ms/day

Classification of Tests


Routine Tests	<ol style="list-style-type: none"> 1. Appearance inspection 2. Dimension check 3. Voltage test between terminal and case 4. Voltage test between terminals 5. Capacitance and DF measurement 6. ESL and ESR measurement 7. Insulation resistance measurement
Type Tests	<ol style="list-style-type: none"> 1. Appearance inspection 2. Dimension check 3. Voltage test between terminal and case 4. Voltage test between terminals 5. Capacitance and DF measurement 6. Vibration and shocks 7. Surge discharge test 8. Biased Humidity 9. Moisture resistance 10. Temperature shock 11. High temperature storage 12. Endurance test

Expected Life Curve

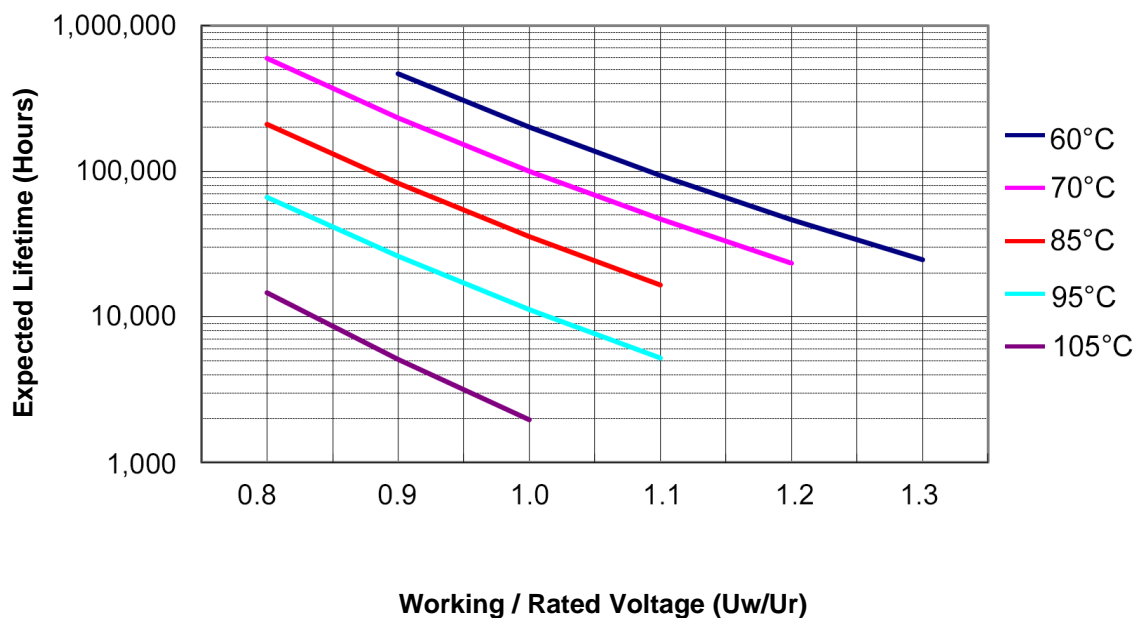

Packaging Information

Capacitors are well protected by foams. And then are packaged in the cartons.

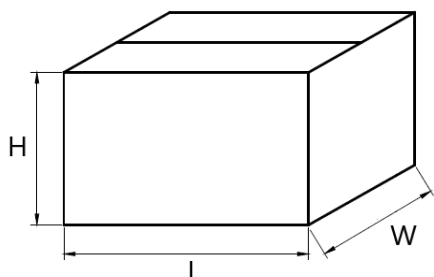

Carton dimensions

Carton No.	L (mm)	W (mm)	H (mm)
1	375	285	235
2	375	285	300
3	375	285	330
4	375	285	365
5	375	285	265

According to the capacitor's diameter, every carton contains capacitors as per the following Table 2.

Capacitor quantity of each carton

The total quantity of each carton is depended on the dimension of customized capacitor.

Cautions and Warnings

- Don't exceed the upper category temperature.
- For longtime storage, maximum relative humidity 80%, no dew allowed on the capacitor.
- Do not use or store capacitor in corrosive atmosphere, in the dusty environment's regular maintenance and cleaning especially of the terminals is required to avoid conductive path between terminal / or terminal and ground.
- Don't apply any mechanical stress to the capacitor terminals, and avoid any compressive, tensile or flexural stress.
- Avoid overload of the capacitors
- Do not have unlimited service life expectancy, the max service life expectancy may vary depending on the application the capacitor is used in.

Disclaimer

All product, product specifications and data in this datasheet are subject to change without notice to improve reliability, function or design or otherwise. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

In individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer application requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.

We continue efforts to improve our products. Therefore, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Aishi. Product names and markings noted herein may be trademarks of their respective owners.